Smart View Training



October 17 - 18, 2018

Agenda

- Smart View Overview
- Connecting to Smart View and Setting Preferences
- Accessing Web Forms and Data Entry
- Dimensional Overview
- Smart View Ad-Hoc Analysis
- Ad-Hoc Reporting Examples
- Questionnaire




Smart View – General Information

- Hyperion Smart View is a Microsoft Excel Add-In that allows end users to connect to Hyperion/Delphi from within Microsoft Excel
- Security will govern if a user can access Smart View, what the user can see and what the user can run
- Your Delphi username and password are the same for using Smart View
- The purpose of Ad-Hoc reporting is to equip end-users with the ability to query data, in a consistent format and create reports that can consistently and quickly be refreshed by each end-user



Smart View – Adding Connection URL

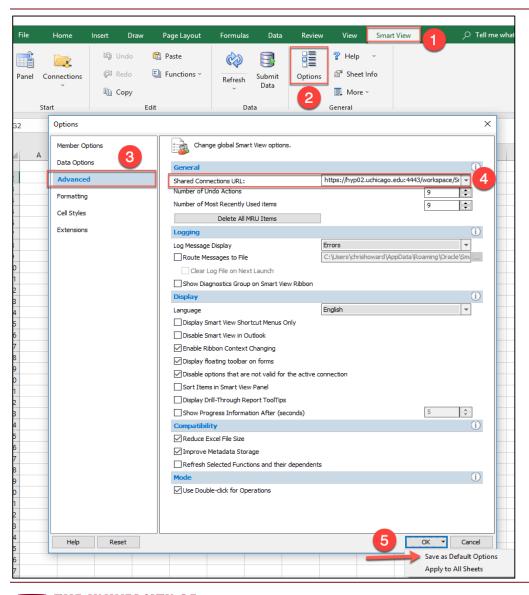

- Select the Smart View tab
- 2. Select Options
- 3. Select Advanced
- 4. Copy


 https://hyp02.uchicago.ed

 u:4443/workspace/Smart

 ViewProviders into Shared
 Connections URL
- 5. Select the down arrow, to the right of 'Ok' and select 'Save as Default Options'




Smart View – Setting Preferences

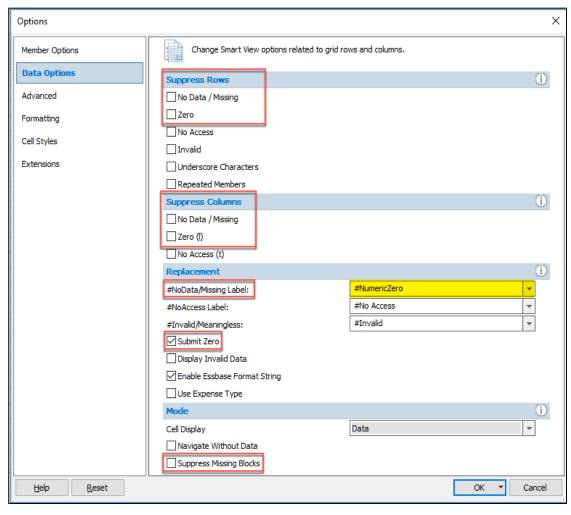

- 1. Check the 'Submit Zero' box
- 2. Set the '#NoData /
 Missing Label' to
 #NumericZero
- 3. Make sure the 'Suppress Missing Blocks' is unchecked
- 4. Column and Row data suppression settings are controlled here in Data Options.
- 5. Click 'Save as Default Options'




Smart View – Setting Preferences

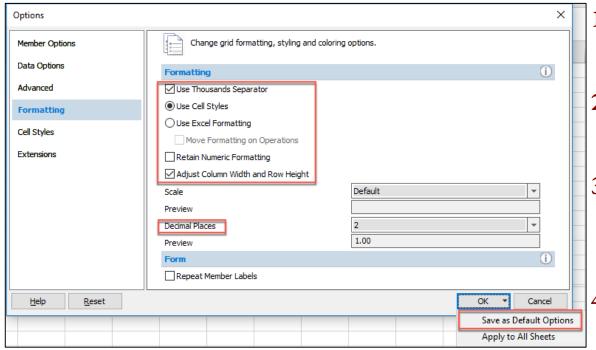

- 1. Check the 'Thousands Separator' box
- Ensure 'Use Cell Styles' is selected
- 3. Set your preference for the number of decimal places that will display
 - Click 'Save as Default Options'




Smart View – Logging In

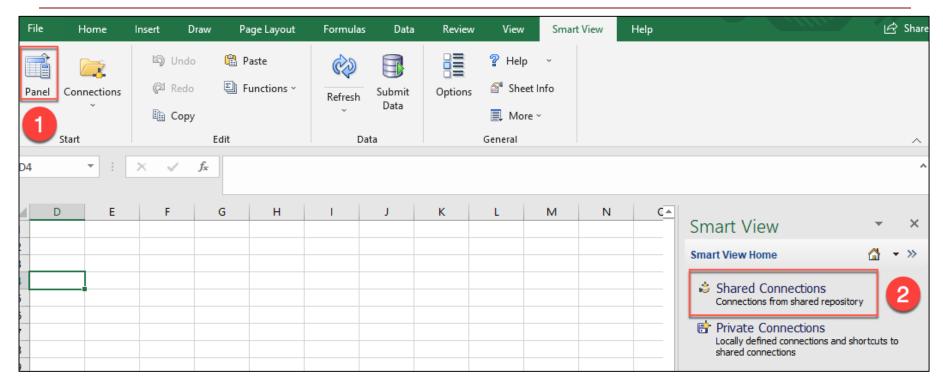


- 1. Select 'Panel'
- 2. Select 'Shared Connections'

Smart View – Logging In Cont.

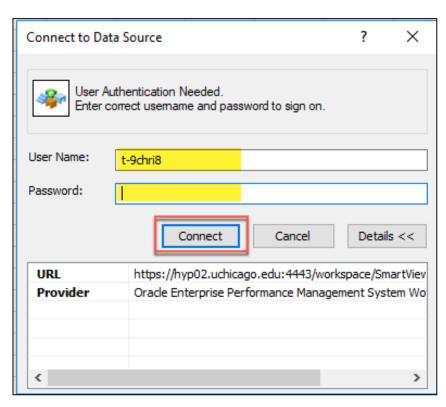


- 1. Enter User Name and Password
- 2. Click 'Connect'


Smart View – Select Application

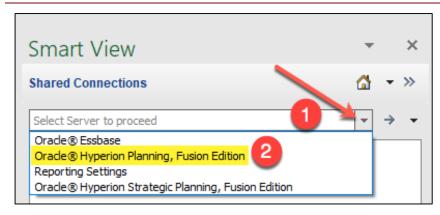

- Select the down arrow
- 2. Click 'Oracle Hyperion Planning, Fusion Edition'
- 3. Click the + icon to the left of 'hyp02.uchicago.edu'
- 4. Click the + icon to the left of 'UCBUD'
- 5. Click the + icon to the left of 'Forms'
- 6. Click the + icon to the left of the form folder you wish to open
- 7. Double click on the name of the form you wish to open

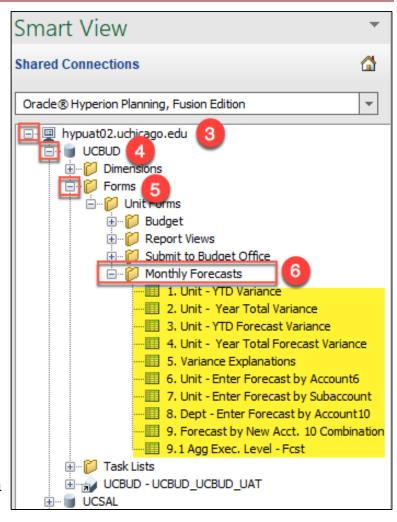


Smart View – Web Forms & Data Entry

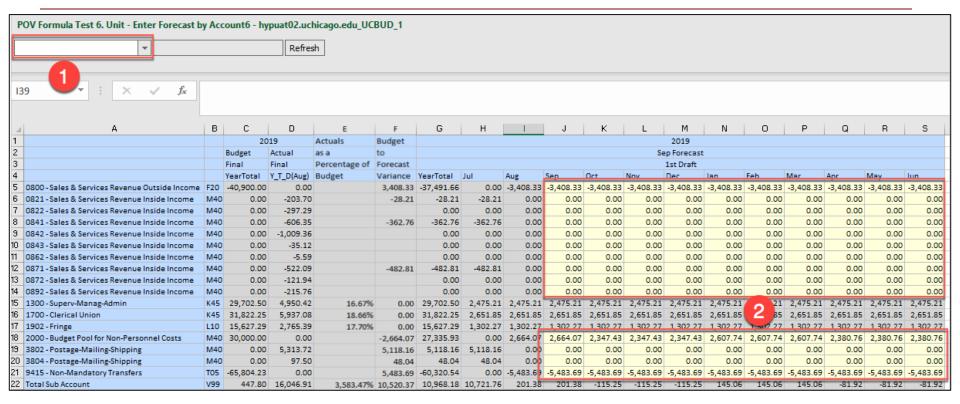

- 1. Point of View selection box, select the Account 6 member. Then click the 'Refresh' button to update the form
- 2. Yellow cells represent cells where data can be entered



Smart View – Web Forms & Data Entry Cont.

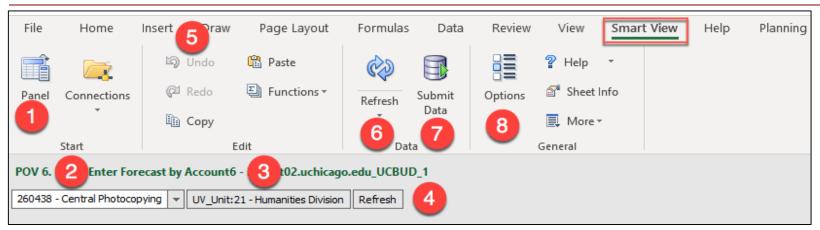

- 1. Panel used to connect your spreadsheet to Smart View
- 2. Point of View depending upon the form, user can change Account or Sub Account Member that the active form is pointing to
- 3. Unit Variable display's your user variable for Unit (this is set in Delphi Workspace)
- 4. Refresh when you have updated the Point of View, you must click refresh to update the form
- 5. Undo/Redo these undo/redo buttons control Smart View activities (up to 9 actions back or forward) separate from traditional Excel undo/redo
- 6. Refresh button can be used interchangeably with button #4, this button is used more during Adhoc analysis
- 7. Submit Data when data has been entered onto an open web form, user must select submit data to enter it into the system. (Similar to Floppy Disk Icon in Delphi)
- **8.** Options Controls all Smart View settings



Smart View – Ad Hoc Analysis

- Ad-Hoc analysis allows end users the ability to slice and dice data that will to support data research and/or custom reporting needs
- All Ad-Hoc analysis is done in Microsoft Excel
- Ad-Hoc workbooks can be saved locally, reopened and refreshed by each end user (Ad-hoc workbooks do not need to be created from scratch)
- To conduct Ad-Hoc analysis in SmartView, end-users need to have an understanding of how data sits in UCBUD and UCSAL
- SmartView Ad-Hoc analysis is governed by the same end-user security that exists in Delphi
- Understanding the dimensionality of the UCBUD and UCSAL Applications will help users understand the power of Ad-Hoc analysis



Smart View – Dimensionality

What is a Dimension?

- Dimensions are structural elements of an application that describe and organize data (data about data)
- Delphi provides six (6) standard, system-defined dimensions
- Delphi also provides the ability to define custom dimensions
- For Example: "I look at my data by Period (Month), by Entity (Account6), and by Sub Account"



Smart View – Application Dimensionality

UCSAL

Scenario (Budget, Actual, Forecast)

Version (1st Draft, Submission, Final)

Period (Q1, Jul, Aug, Sep, Q2, ...)

Account – Sub Account (SLXXXX)

Entity - Account 6 (FAS 10, FAS 400,

Year (FY18, FY19...)

123456 V01)

Standard Dimensions

2

5

6

Additional Dimensions		
7	Measures (Benefits, Allocation Pay Amt.)	
8	Job Title (F – Facilities, 6 digit code)	
9	Positions (Academic Ops, WD_12, P9014567)	
10	Employee (HR_10, HR_400, 12345678H)	

UCBUD

Standard Dimensions		
1	Scenario (Budget, Actual, Forecast)	
2	Version (1st Draft, Submission, Final)	
3	Period (Q1, Jul, Aug, Sep, Q2,)	
4	Year (FY18, FY19)	
5	Account - Sub Account (SLXXXX)	
6	Entity – Account 6 (FAS_10, FAS_400, 123456_V01)	


Additional Dimensions		
7	View (V99, P99, M40)	



Smart View – Hierarchies


What is a Member?

- A member is an element or item in a dimension
- Member names must be unique across an application
- For Example: FAS_21, SL7100, Dec, Actual

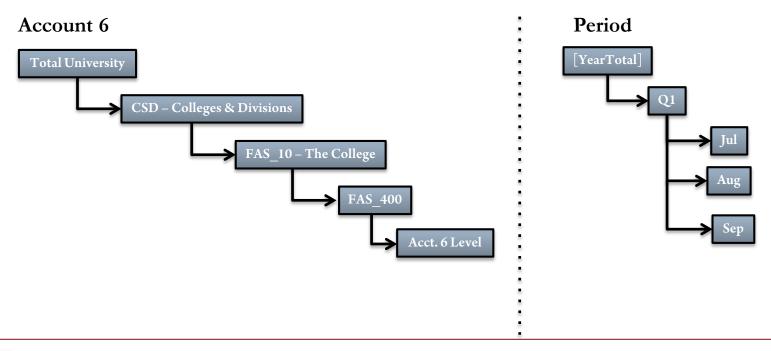

Smart View – Hierarchy Terminology

- Parent Members one level below a specified member
 - O Q1, Q2, Q3, and Q4 are parent members containing monthly detail
- Children Members with parents above them
 - Jul, Aug and Sep are children of the parent Q1
- Siblings Members of the same parent and on the same level
 - Jul, Aug and Sep are siblings
- Descendants Members at any level below a parent
 - Ol, Jul, Aug, Sep, Q2, Q3, and Q4 are all descendants of [Year]

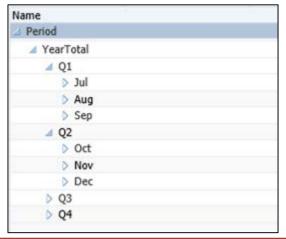




Smart View – How to Find Data


- A multidimensional database approach enables multiple views of datasets, with any given data point being the intersection of the defined dimensions
- Example:
 - Any single piece of data resides at the intersection of all the dimensions in the given application
 - View data by any member within any dimension
 - Data is entered/loaded at the bottom level (level zero) of all dimensions

Metadata / Data Overview

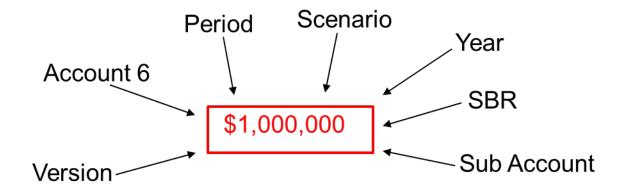




Smart View – Logging In

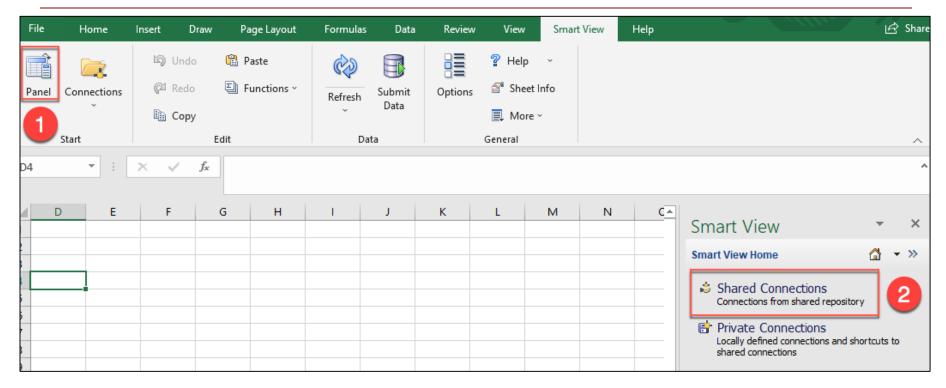


- 1. Select 'Panel'
- 2. Select 'Shared Connections'

Smart View – Logging In Cont.

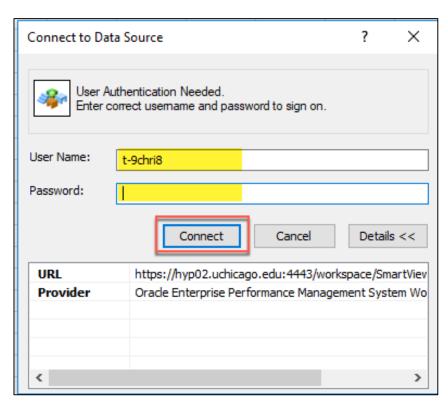

- 1. Enter User Name and Password
- 2. Click 'Connect'


Smart View – Ad Hoc Connection

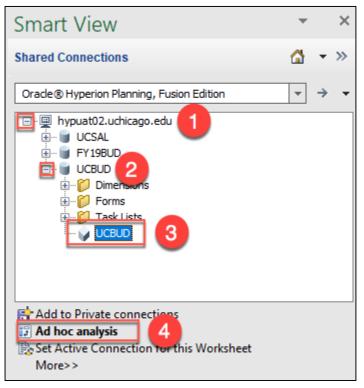

- Click the + icon to left of hyp02.uchicago.edu
- 2. Click the + icon to the left of application you want to run your Ad-Hoc analysis in (UCBUD or UCSAL)
- 3. Click the + icon to the left of the database you want to run your Ad-Hoc analysis in (UCBUD → UCBUD, UCSAL → UCSAL)
- 4. Click Ad-Hoc analysis




Smart View – Ad-Hoc Preferences

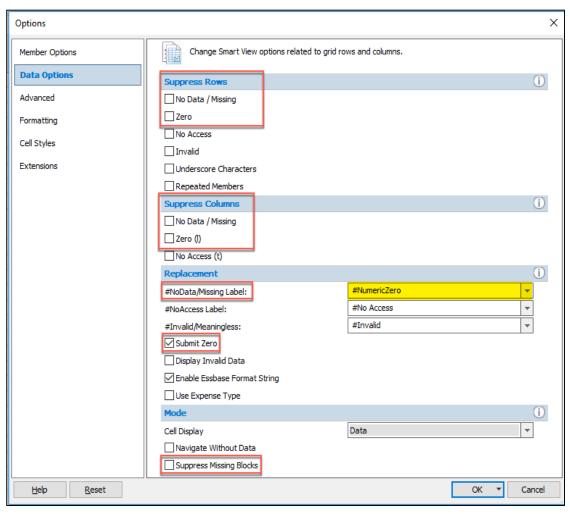

- 1. Make sure the 'Suppress Missing Blocks' is unchecked
- 2. Column and Row data suppression settings should be turned off when starting Ad-Hoc analysis.
- 3. If any off the suppression are enabled, you will receive an error when attempting to create a new Ad-Hoc analysis

Smart View - Ad Hoc Grid

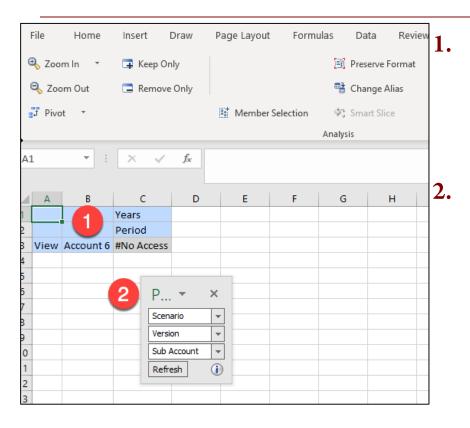

- The default starting Ad-Hoc grid has the Years and Period dimensions in the Columns and the View and Account 6 dimensions in the rows.
- The remaining application dimensions will be located in the POV box. These dimensions can be added to either the row, column or left in the POV box.


Smart View - Ad Hoc Buttons



- 1. Zoom In/Zoom Out use these buttons to drill down into a lower level of the hierarchy or drill out of the hierarchy
- 2. Pivot Move a dimension from the column to the row, row to the column or into the Point of View
- 3. Keep Only/Remove Only keep or remove the selected member from the selected dimension
- 4. Member Selection select a member from any dimension
- 5. Change Alias toggle between the member name/alias (SL7100/7100-Domestic Travel)
- 6. Refresh refresh the Ad-Hoc analysis, required when dimensions/members are moved or if data needs to be refreshed
- 7. Submit Data end users cannot submit data via Ad-Hoc




Smart View – Member Selection

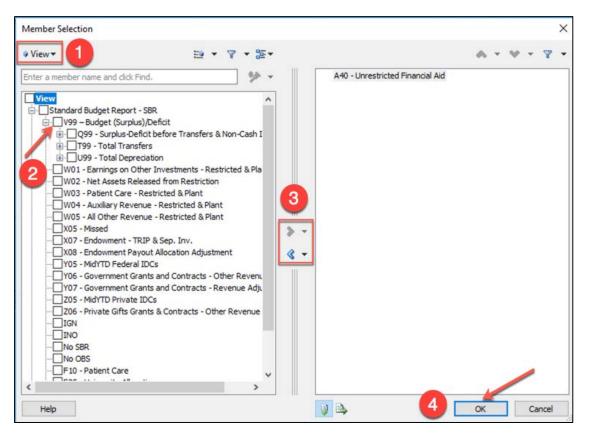


- Select Dimension select the dimension you want to select a member from
- 2. Member check the box of the member you wish to select
- 3. Finalize Selection once member has been selected, click the blue arrow to finalize the selection
- Member Selection select a member from any dimension
- 5. Select Ok select Ok to finalize the selection

Smart View – Ad Hoc (Budget Example)

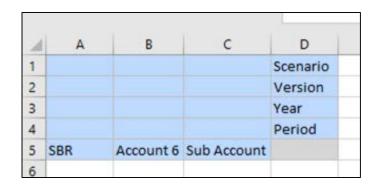

- 1. Scenario = Budget
- 2. Version = 1^{st} Draft/Submission/Final
- Period = YearTotal
- 4. Year = Current Fiscal Year (FY19)
- 5. Account 6 = FAS_XX (Start with your unit or your dept
- 6. Sub Account = Total Sub Account

Smart View – Ad Hoc (Forecast Example)

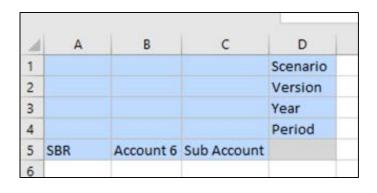

- 1. Scenario = Current Forecast
- 2. Version = 1^{st} Draft/Submission/Final
- Period = YearTotal
- 4. Year = Current Fiscal Year (FY19)
- 5. Account 6 = FAS_XX (Start with your unit or your dept
- 6. Sub Account = Total Sub Account

Questions??

